


### Visor de Linha Tipo Macho



Ø	A	B	Pressão Maxima Kgf/cm2
1"	63	31,7	15
1".1/2"	78	31,7	11
2"	92	31,7	10
2.1/2"	112	35,2	10
3"	127	40,2	8
4"	148	41,2	6

Visores de 6" e 8" Sob Consulta


### Visor de Linha Tubular

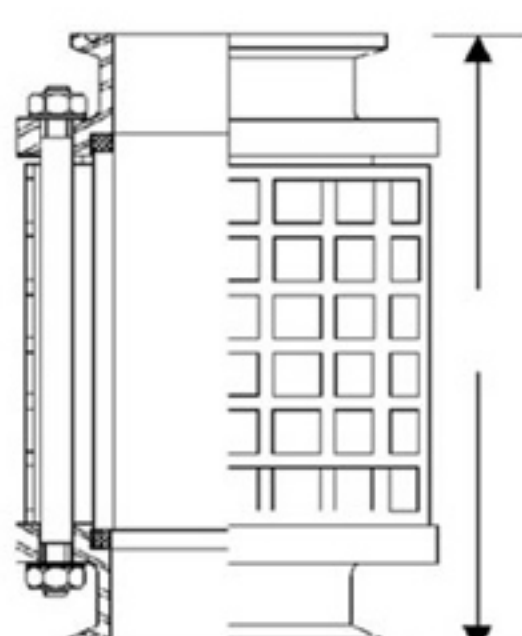

Ø	RJT		SMS		IDF		DIN		Kgf/cm2		
	2 TC	2 M	M- NP	2 M	M- NP	2 M	M- NP				
1"	128	154	176	165	168	161	172	165	176	172	16
1.1/2"	128	154	176	165	168	161	172	165	176	172	13
2"	128	154	176	165	168	161	172	165	176	173	10
2.1/2"	128	154	176	165	176	165	172	165	182	177	10
3"	128	154	176	165	176	165	172		190	187	8
4"	128	158	181	167	198	173	188	173	190	187	6

Visores de 6" e 8" Sob Consulta

### Visor de Linha Plano

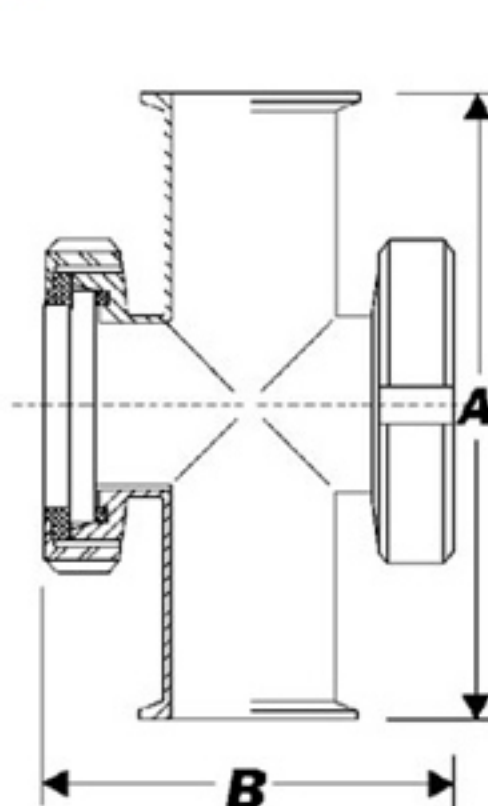

Ø	A						B
	Solda	TC	SMS	RJT	IDF	DIN	
1"	96,0	121,4	144,0	144,0	139,0	144,0	93,4
1.1/2"	115,0	140,4	163,0	163,0	158,0	163,0	105,4
2"	154,0	179,4	202,0	202,0	197,0	202,0	119,4
2.1/2"	154,0	179,4	202,0	202,0	197,0	208,0	139,4
3"	166,0	197,4	214,0	214,0	209,0	228,0	162,4
4"	197,0	228,8	245,0	245,0	257,0	258,5	190,4

Visores de 6" e 8" Sob Consulta